

LCD FUNCTION TABLE

| LCD Display | Instruction |
|-------------------|---|
| Ready Haze | Preheating is complete, the machine is ready, you can spray smoke |
| Warning xxS | In the heating, countdown XX seconds |
| Interval Set xx | Interval setting |
| Duration Set xx | Spray time setting |
| DMX512 Set xxx | DMX address code setting |
| Volume Set xxx | Spray output size setting |
| Fan Speed Set xxx | Fan speed setting |

5 MAINTENANCE

To achieve the maximum service life of the machine you must regularly clean the machine and test if it is functioning correctly.

Contact us if the machine is not functioning correctly.


DANGER

Do not replace parts yourself; always consult us.

6 TROUBLESHOOTING

Always contact us if any malfunctions or errors occur that cannot be solved with the instructions as described in this manual.

OUTPUT WATERBASE FOG MACHINE
USER MANUAL

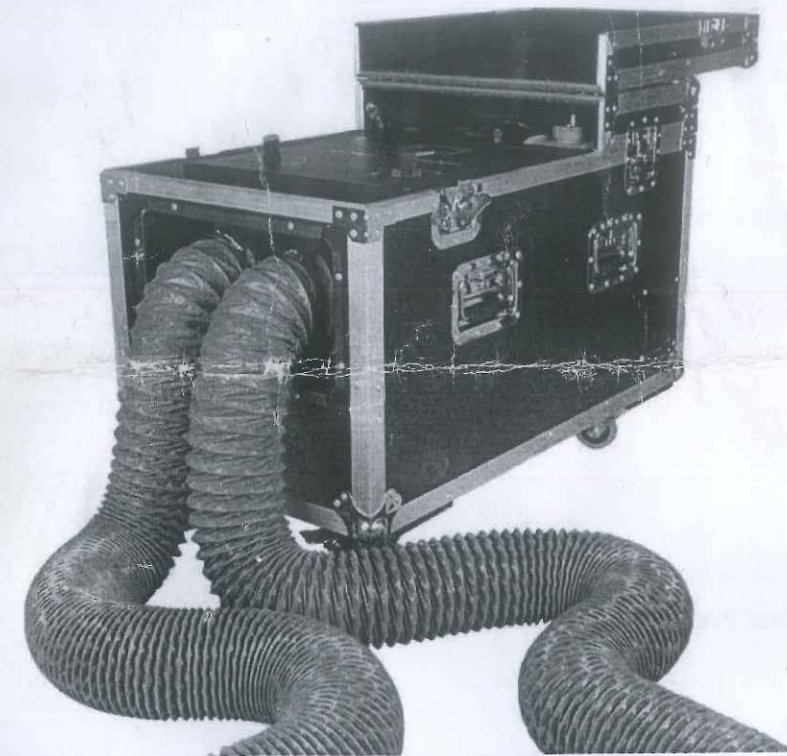

DISCLAIMER

WARNING

Read this manual carefully before installing and/or using this product. Failure to read this manual and to follow the printed instructions may lead to personal injury or property damage.

FORWARD

Congratulations! Thanks for purchase from us.

This manual contains all information required for the intended use of the equipment. Deviation from the described intended use can result in a hazardous situation and/or property damage.

This manual includes notes and warnings on safe operation of the equipment.

LIABILITY

Accepts no liability for claims from third parties arising from unauthorised use, use other than that stated in this manual, and use other than in accordance with the General Conditions registered at the Chamber of Commerce.

Refer further to the General Conditions. These are available on request, free of charge.

Although considerable care has been taken to ensure a correct and suitably comprehensive description of all relevant components, the manual may nonetheless contain errors and inaccuracies.

Should you detect any errors or inaccuracies in the manual, we would be grateful if you would inform us. This helps us to further improve our documentation.

TECHNICAL DATA

| | | |
|---------------------|-------------------------|---|
| Product | Product Name | 3000W Double Output Waterbase Fog Machine |
| | Product Type | Fog |
| Main Specifications | Heat-up Time | 4min |
| | Control Method | DMX512 and Remote |
| Capacity | DMX Connectors | 3pin XLR |
| | Oil Tank Capacity | 3L |
| | Water Tank Capacity | 10.5L |
| Electrical | Voltage Input (Vac) | 100-120V or 200- 240 Vac |
| | Voltage Frequency | 50 or 60 Hz |
| | Electric Current | 110V18A / 220V9A |
| | DMX Channel | 2 |
| Usage | Power Consumption (Vac) | 3000W |
| | Consumable (s) | Low Fog Fluid and Water |
| Output Coverage | Water Consumption (L/H) | 12L |
| | Fluid Consumption (L/H) | 1L |
| | Coverage | 70sm/60s |
| Machine | Size | 86*49*63cm |
| | N.W | 55kg |
| | G.W | 59kg |

NOTICE

Wind circumstances will influence the output distance. The given values are estimated values

1 SAFELY!

The 3000W Double Output Waterbase Fog Machine is designed and constructed so that it can be used in a safe manner. Specifically, this refers to the usage, situations, and prescriptions for the device as described in this documentation. must be installed by a qualified professional. All maintenance must be carried out by a qualified electrician. It is the responsibility of all electrician to use the 3000W Double Output Waterbase Fog Machine to read and follow the instructions in this manual.

GENERAL SAFETY RULES

- Keep this device dry.
- Always connect to a grounded circuit to avoid risk of electrocution.
- Before connecting machine to power, always check voltage indicate on machine
- match to your local AC voltage. Do not use the machine if AC power voltage does not match.
- Disconnect the machine from AC power before servicing and when not in use.
- This product is for indoor use only! Do not expose to rain or moisture. If fluid is spilled, disconnect AC power and clean with a damp cloth. If fluid is spilled onto electronic parts, immediately unplug the machine.
- No user serviceable and modifiable parts inside. Never try to repair this product, an unauthorized technician may cause damage or malfunction to the machine.
- For adult use only. Never leave the machine running unattended.
- Installed the machine in a well-ventilated area. Provide at least 50 cm space around the machine.
- Never add flammable liquid of any kind to the machine.
- Make sure there are no flammable materials close to the machine while operating.
- Only use Moka fluid. Other fluid may lead to heater clog and malfunction.
- If the machine fails to work, unplug the machine and stop operation immediately.
- Before transporting the machine, make sure the fluid tank is completely drained.
- Fog fluid may present health risks if swallowed. Do not drink fog fluid. Store it securely. In case of eye contact or if fluid is swallowed, immediately look for medical advice.

2 FEATURES

- ✓ 3000W Double Output Waterbase Fog Machine adopts independent research and development of switching power supply. It is easy to install, greatly simplifying the circuit connection of the machine and greatly improving the stability of the machine.
- ✓ 3000W Double Output Waterbase Fog Machine adopts self-developed mold-opening plastic water tank, which will never rust and leak.
- ✓ 3000W Double Output Waterbase Fog Machine comes with a water tank water level line. It is easy to see when adding water. It is also convenient for users to know the water level and do it in time.
- ✓ The water discharge hole of this product is in front, completely separated from the line, and easy to operate. There is no leaking line

SET UP INSTRUCTIONS

- 1) Place the machine on a flat surface and in a suitable large area with at least 50 cm, Open space around the machine.
- 2) Fill the fluid tank with Moka approved fluid and clean water.
- 3) Connect the machine to suitable rated power supply. To determine the power requirement for the machine refer to the label on the machine. Always connect the machine to a protected circuit and ensure it is properly Grounded to avoid risk of electrocution.
- 4) Turn on the machine and allow it to heat up. Heat up takes approximately 4min. Once the machine has reached operating temperature, the display will show Ready Haze. Now the machine is ready for operation.
- 5) To start making fog, press the VOLUME button on the control panel.

4 OPERATION OF DISPLAY

- 30% or less output is only water mist, no smoke. More than 30% of the smoke output.
- Open more than 30% of the output, and there will be smoke output after 4s.
- Dmx channel. The first channel fan switch and output size adjustment, the second channel water mist switch and output size.
- built-in overheat protection, if the ventilation is poor, the controller temperature is too high, the controller will start protection, the temperature drops Automatically resume work afterwards.
- Remote control A open B closed

OPERATION OF DISPLAY

| | |
|----------|------------------------------|
| FUNCTION | Main menu function selection |
| UP | Modify parameter value |
| DOWN | Modify parameter value |
| TIMER | Timed start/stop |
| VOLUME | Output start/stop |
| MANUAL | Fan speed setting |